



ORDER ref. _____
ORDER date _____

CUSTOMER DETAILS

USER REFERENCE

NB: all sizes for lengths mentioned are in cm

☐ Std free choice ☒ option with cost

SEAT WIDTH (SW)

☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48

SEAT DEPT (SD)

☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46

BACKREST HEIGH (BH)


from 30 - 46 in 1.5mm step

30 - 40 in 1,5mm steps 35 - 46 in 1.5mm steps

LEG LENGTH (LL)

from 38 to 48,5 in steps 1.5cm

Please advise of the real thickness in front part of seat cushion _____

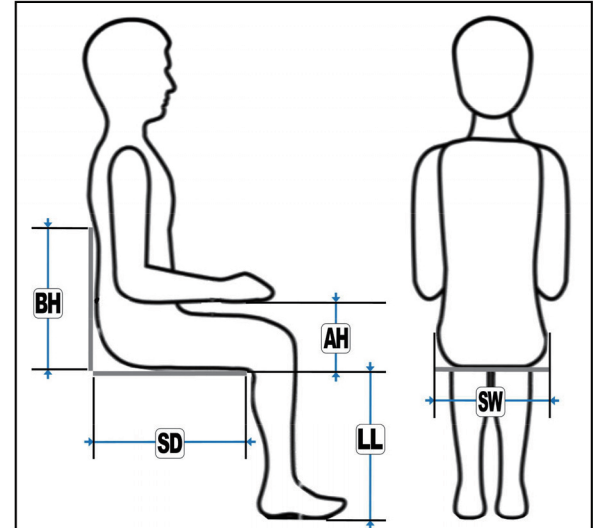

FRAME

☐ Aluminium

☒ Magnesium



Color 1

Color 2

Color 3

Color 4




Color 5

Color 6

Color 7


Color 8

FRAME DIMENSIONS AND ANGLES

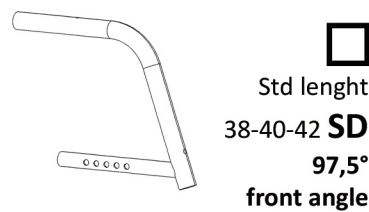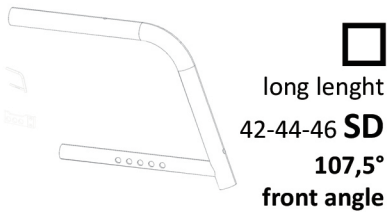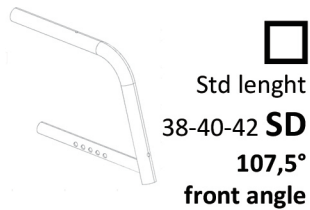


SKIRT GUARDS





NO SKIRT GUARDS



PLASTIC BLACK
FIXED FIXED




PLASTIC BLACK
STRAIGHT DETACHABLE

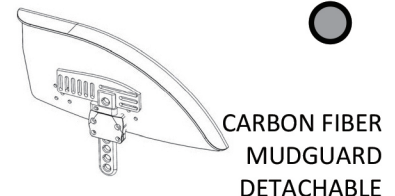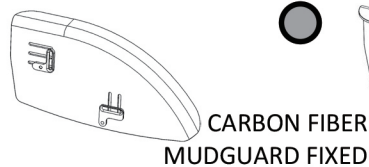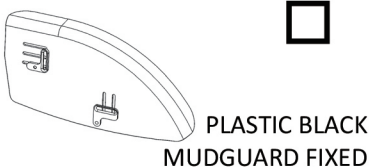

BACKREST SETTING

STD tube backrest (BH) 30-40 ☐

LONG tube backrest (BH) 35-46 ☐

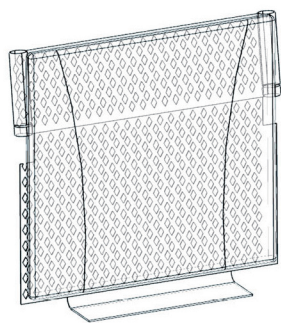


Upholstery soft padded ☐
Mesh 3D
With tension adjustable belts



STD bended backrest handles ☐

folding backrest handles ☐

SEAT SETTING

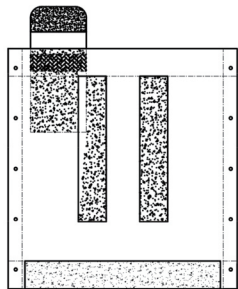

☐
STD seat
With underseat
pouch

FOOTREST SETTING



Single aluminium
plate
ankle angle adj



Right opening



Left opening

FRONT WHEEL SETTING



3" alu rim



4" plastic rim



4" alu rim



5" plastic rim



5" alu rim



6" plastic rim



6" alu rim




6" plastic rim - air tyre




** 6" wheels can be used only with standard fork*

FRONT FORKS SETTING

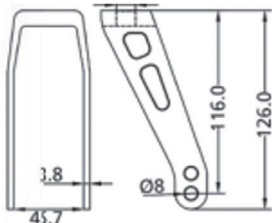

Standard alu fork



Short alu fork

REAR WHEELS SETTING



22SL



24SL



24UL



24RF

22" light

☐

24" light

☐

24" ultralight

☒

24" reinforced

☒



24BH



24CS

24" large hub

☒

24" large hub
Carbon spokes

☒

HANDRIM SETTING



Aluminium
Anodized
Silver

22"

☐

24"

☐



Aluminium
Anodized
Black

22"

☐

24"

☐



Titanium

24"

☒



PVC coated

24"

☒



Aluminium
big ergonomic
shape



24"

☒



Aluminium
big ergonomic
shape with
Rubber strip

31.3

24

24"

☒



Aluminium
tetra ergonomic
shape with
PVC coated

28

25

24"

☒



Aluminium
big diameter
Pvc coated

24"

☒

TYRE SETTING



High pressure
Low textured

22"x1"

☐

24"x1"

☐

22SL

24SL

24BH

24CS



High pressure
Low textured

22"x1"

☐

24"x1"

☐

22SL

24SL

24BH

24CS



High pressure
Low textured
Black

22"x1"

☐

24"x1"

☐

22SL

24SL

24BH

24CS



High pressure
hard textured
Black reinforced

22"x1"

☒

24"x1"

☒

22SL

24SL

24BH

24CS



High pressure
Low textured
Ultra light

24"x1"

☐

24UL



textured
Large rim

24"x1 3/8"

☐

24RF



PU solid tyre
Low textured

22"x1"

☒

24"x1"

☒


22SL

24SL

24BH

24CS

REAR WHEEL PLATE

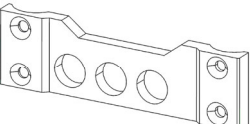

STD rear wheel plate
6 orizontal politions

NEXT AVAILABILITY

Back positioned wheel plate

OF_S5 rev.1.0 30.03.2025

page 3

BRAKE SETTING

All brakes are shown in braking position


Push to brake
bended lever



Push to brake
straight lever




Push to brake
Folding
Extended
lever



Pull to brake
straight lever



Pull to brake
Folding
Extended
lever



Scissor's style
brake



AXLES SETTING



Standard
Stainless steel axle



Tetra release
Stainless steel axle



Standard
Titanium axle




Tetra release
Titanium axle




ACCESSORIES


SWING AWAY ARMESTS

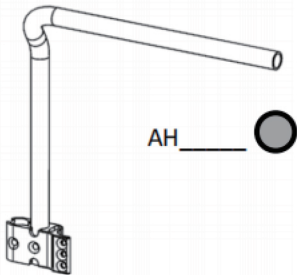


ANTITIPP

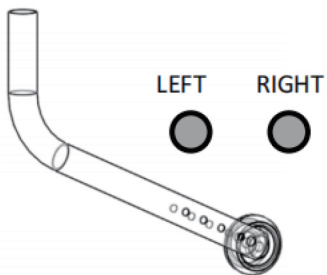


TIPPING HELP

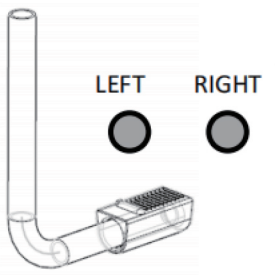

TRANSIT WHEELS

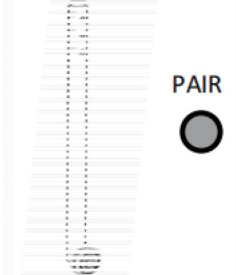

SPECIFICATIONS

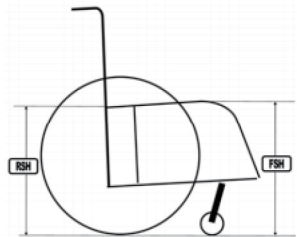

	RSH				
	1	2	3	4	5
22" wheel	37,0	39,5	42,0	44,5	47,0
24" wheel	39,0	41,5	44,0	46,5	49,0

	FSH				
	STANDARD FORK			SHORT FORK	
	1	2	3	1	2
3" wheel	48,8	49,9	51,1	44,0	45,2
4" wheel	50,2	51,3	52,5	45,4	46,6
5" wheel	51,4	52,5	53,7	46,6	47,8
6" wheel	52,5	53,6	54,8	NA	NA



Seat width
36-39-42-45-48cm



Seat depth
38-40-42-44-46cm



Seat height at the front
Seat height at the rear
See the left table



Rear wheel position
0-6cm



Backrest height
30-40cm
35-46cm



Backrest angle adjustment
90°



Leg length adjustment
38~48.5cm



Frame angle
97.5° -107.5°



Overall width
seat width+17cm



Overall length
88/93cm



Overall weight
Aluminum 11.8kg
Magnesium 10.95kg



Weight without rear wheels
Aluminum 8.7kg
Magnesium 7.85kg



Maximum load
125kg

NOTE