



ORDER ref. _____
ORDER date _____

CUSTOMER DETAILS

USER REFERENCE

NB: all sizes for lenghts mentioned are in cm

☐ Std free choice ☒ option with cost

SEAT WIDTH (SW)

☐ 36 ☐ 39 ☐ 42 ☐ 45 ☐ 48

SEAT DEPT (SD)

☐ 37,5 ☐ 40 ☐ 42,5 ☐ 45 ☐ 47,5

BACKREST HEIGH (BH)


from 30 to 47 in steps 2 cm

30-40 cm std tube 37-47 cm long tube

LEG LENGHT (LL)

from 38 to 43 in steps 1,5 cm

Please advise of the real thickness in front part of seat cushion _____

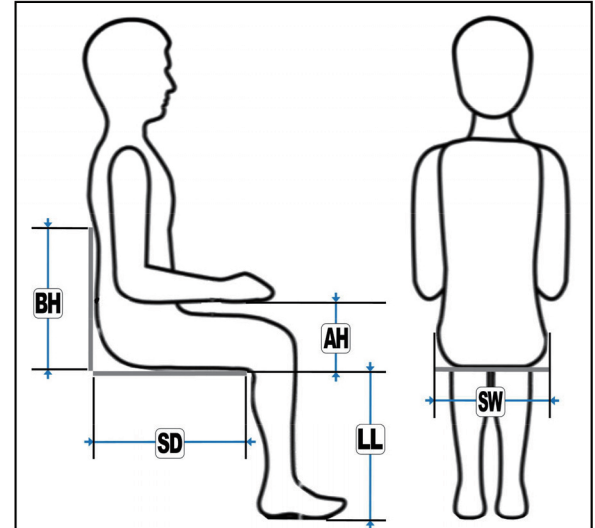

FRAME

☐ Aluminium

☒ Magnesium



Color 1



Color 2



Color 3



Color 4



Color 5



Color 6




Color 7



Color 8


FRAME DIMENSIONS AND ANGLES

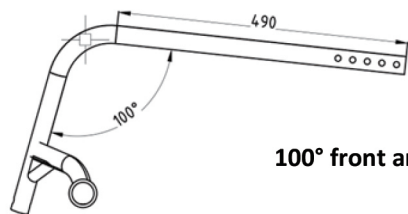

100° front angle




Std lenght
37,5-40-42,5 SD

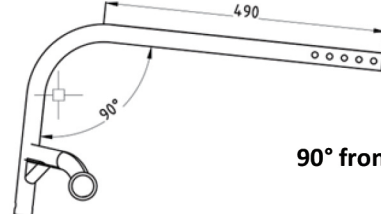

90° front angle




Std lenght
37,5-40-42,5cm

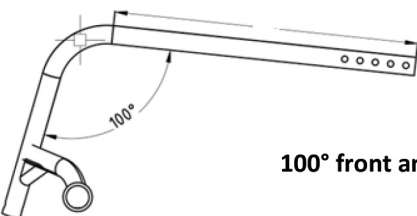

100° front angle



long lenght
42,5-45 SD

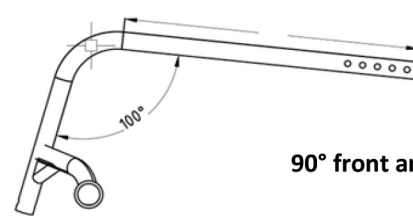

90° front angle




Long lenght
42,5-45 SD

LATERAL FRAME SETTING




Std lateral frame carbon

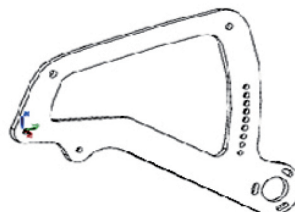

Extended lenght lateral frame carbon



REAR WHEELS BAR



Carbon fiber 0° camber



Carbon fiber 2° camber




Carbon fiber 4° camber


SKIRT GUARDS



NO SKIRT GUARDS



PLASTIC BLACK
STRAIGHT



CARBON FIBER
STRAIGHT



PLASTIC BLACK
WITH MUDGUARD



CARBON FIBER
WITH MUDGUARD



BACKREST SETTING

Standard angle adjustable
87° - 90°-93°


Same material of main frame



STD tube backrest (BH) 30-38



LONG tube backrest (BH) 38-48

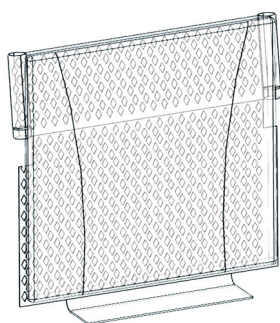

Upholstery soft padded
Mesh 3D
With tension adjustable belts




STD bended backrest handles




folding backrest handles




SEAT SETTING

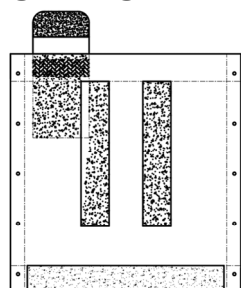

STD seat
With underseat
pouch

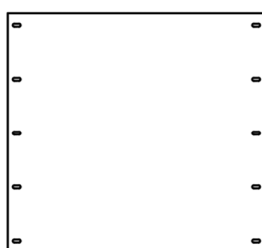


Rigid carbon fiber
plate




Crossed band seat


FOOTREST SETTING

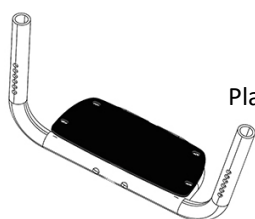


Plastic plate

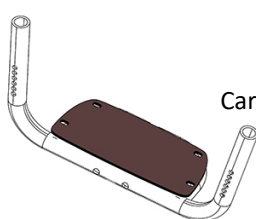

Carbon fiber
plate

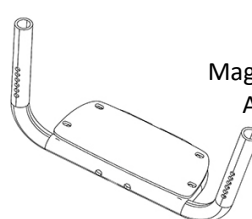

Magnesium
Aluminium
plate

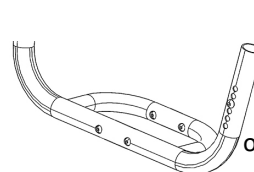

No plate
only frame

FRONT WHEEL SETTING



3" solid



3" alu rim



4" plastic rim



4" alu rim



5" plastic rim




5" alu rim



FRONT FORKS SETTING



Standard alu fork



Long alu fork



One arm alu fork

REAR WHEELS SETTING



22SL

22" light ☐



24SL

24" light ☐



24UL

24" ultralight ☒



24RF

24" reinforced ☒



24BH

24" large hub ☒



24CS

24" large hub
Carbon spokes ☒



24OR

24" large hub
Offroad style ☒

HANDRIM SETTING



Aluminium
Anodized
Silver

22" ☐
24" ☐



Aluminium
Anodized
Black

22" ☐
24" ☐



Titanium

24" ☒



PVC coated

24" ☒



Aluminium
big ergonomic
shape

24" ☒



Aluminium
big ergonomic
shape with
Rubber strip

24" ☒



Aluminium
tetra ergonomic
shape with
PVC coated

24" ☒



Aluminium
big diameter
Pvc coated

24" ☒

TYRE SETTING



High pressure
Low textured

22"x1" ☐
24"x1" ☐

22SL 24SL
24BH 24CS



High pressure
Low textured

22"x1" ☐
24"x1" ☐

22SL 24SL
24BH 24CS



High pressure
Low textured
Black

22"x1" ☐
24"x1" ☐

22SL 24SL
24BH 24CS



High pressure
hard textured
Black reinforced

22"x1" ☒
24"x1" ☒

22SL 24SL
24BH 24CS



High pressure
Low textured
Ultra light

24"x1" ☐

24UL



textured
Large rim

24"x1 3/8" ☐

24RF



PU solid tyre
Low textured

22"x1" ☒
24"x1" ☒

22SL 24SL
24BH 24CS



Hard textured
Offroad style

24"x1.75" ☐

24OR

BRAKE SETTING

All brakes are shown in braking position

Push to brake
bended lever




☐

Push to brake
straight lever




☐

Push to brake
Folding
Extended
lever




☒

Pull to brake
straight lever



☒

Pull to brake
Folding
Extended
lever



☒













Scissor's style
brake



☐



TRANSIT WHEELS

RSHFSH